



Safer Vaping

PRODUCT SPECIFICATIONS

Product Description Cylindrical Li-ion rechargeable battery 14500
650mAh Capacity

Product Name EnerCig EC- 14500HP

Model EC- 14500HP





Safer Vaping

Contents

1. Application Scope.....	3
2. Model	3
3. Dimensions.....	3
4. Technical Specifications	4
5. General Performance	5
6. Environment Performance.....	6
7. Safety Characteristics.....	6
8. Safety Instructions	7
9. Battery Operation instructions	8
10. Period of Warranty	9
11. Chemical Reaction.....	9
12. Note.....	9



Safer Vaping


1. Application Scope

These specifications describe the basic performance, technical requirements, testing methods, warning and caution of the Li-ion cylindrical rechargeable battery. The specifications only apply to the model mentioned above.

2. Model

EC-14500HP

3. Dimensions

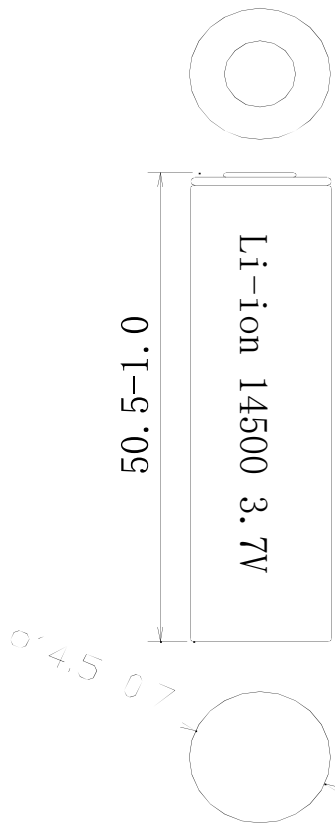

Item	Dimension (mm)
H	50.5 – 51.0
Φ	14.5 – 14.7



Safer Vaping

4. Technical Specifications

NO.	Item	Specifications
4.1	Typical Capacity	670 mAh @ 0.2C Discharge
	Minimum capacity	650 mAh @ 0.2C Discharge
4.2	Nominal voltage	3.7V
4.3	Standard Charge	CC/CV, 0.2C ₅ A, 4.20V
4.4	Standard Discharge	CC, 0.2C ₅ A, 3V
4.5	End-of-charge Voltage	4.20V±0.05V
4.6	End-of-charge Current	0.02C ₅ A (at CV mode)
4.7	End-of-discharge Voltage	3V
4.8	Charging Time	8.0 hours (standard charge)
4.9	Quick Charge Current	650mA (1.0C ₅ rate)
4.10	Quick Discharge Current	6500mA (10.0C ₅ rate)
4.11	Max Discharge Current	13000mA (20.0C ₅ rate)
4.12	Initial Impedance	Max. 30 mΩ
4.13	Weight	Approx. 19.5±2g
4.14	Operating temperature	Charging: 0°C~45°C Discharging: -20°C~60°C
4.15	Storage temperature	-5°C~35°C
4.16	Storage Humidity	≤75% RH
4.17	Appearance	Without scratch, distortion, contamination and leakage



Safer Vaping

4.18	Standard environmental condition	Temperature: 25±2°C Humidity: -75%RH Atmospheric Pressure: 86-106 KPA				
4.19	Temperature Dependence of Discharge Capacity @ 0.2C Discharge					
	Charge temperature	Discharge temperature				
	25°C	-10°C	0°C	15°C	25°C	40°C
	Relative Capacity	50%	80%	90%	100%	100%

5. General Performance

No.	Item	Test Methods and Condition	Criteria
5.1	0.2C Capacity 0.2C	After standard charging, rest battery for 10min, then discharging at 0.2C to voltage 3V, recording the discharging time.	≥300min
5.2	Cycle Life	Constant current 0.5C charge to 4.2V, then constant voltage charge to current declines to 0.01C, rest 10min, constant current 0.5C discharge to 3V, rest 10min. Repeat above steps till continuously discharging capacity Higher than 80% of the Initial Capacities of the Cells.	≥300 times
5.3	Capability of keeping electricity	20±5°C, after standard charging, rest the battery 28days, discharging at 0.2C to voltage 3V, recording the discharging time.	≥240min



Safer Vaping

6. Environment Performance

No.	Item	Test Methods and Condition	Criteria
6.1	Discharge at high temperature	After standard charging, rest the cells 4h at $60\pm 2^{\circ}\text{C}$, then discharging at 1C to voltage 3V, recording the discharging time.	$\geq 54\text{min}$
6.2	Discharge at low temperature	After standard charging, rest the cells for 16h at $-20\pm 2^{\circ}\text{C}$, then discharging at 0.2C to voltage 3V, recording the discharging time.	$\geq 210\text{min}$
6.4	Thermal shock	Put the cells in the oven. The temperature of the oven is to be raised at $5\pm 2^{\circ}\text{C}$ per minute to a temperature of $130\pm 2^{\circ}\text{C}$ and remains 30 minutes.	No fire, no smoke

7. Safety Characteristics

No.	Item	Test Methods and Condition	Criteria
7.1	Overcharge testing	At $23\pm 5^{\circ}\text{C}$, charging cells with constant current 2C to voltage 5.0V, Stop test till cells temperature 10°C lower than max temperature.	No smoke or fire
7.2	Over discharge testing	At $23\pm 5^{\circ}\text{C}$, According to the requirements of standard charge, the cells will be discharge to cut-off voltage, then connect with external load of 30 ohms for 24 hours.	No fire, no smoke, no leakage.
7.3	Short-circuit testing	At $23\pm 5^{\circ}\text{C}$, after standard charging, connect cells anode and cathode by wire which impedance less than $80\pm 20\text{m}\Omega$, keep 6h.	No smoke or fire

✘ Above testing of safety characteristics must be done in a designated laboratory and with protective equipment only!



Safer Vaping

8. Safety Instructions

To ensure proper use of the battery please read the manual carefully before using it.

Handling

- Do not expose to, dispose of the battery in fire.
- Do not put the battery in a charger or equipment with wrong terminals connected.
- Avoid shorting the battery
- Avoid excessive physical shock or vibration.
- Do not disassemble or deform the battery.
- Do not immerse in water.
- Do not use the battery mixed with other different make, type, or model batteries.
- Keep out of the reach of children.

Charge and discharge

- Battery must be charged in appropriate charger only.
- Never use a modified or damaged charger.
- Do not leave battery in charger over 24 hours.

Storage

- Store the battery in a cool, dry and well-ventilated area.

Disposal

- Regulations vary for different countries. Dispose of in accordance with local regulations.



Safer Vaping

9. Battery Operation instructions

9.1 Charging

- Charging current: Cannot surpass the highest charging current which in this specification document stipulated.
- Charging voltage: Does not have to surpass the highest amount which in this specification document stipulated to decide the voltage.
- Charge temperature: The battery must carry on the charge in the ambient temperature scope which this specification document stipulated
- Uses the constant electric current and the constant voltage way charge, the prohibition reverse charges. If the battery positive electrode and the cathode meet instead, can damage the battery

9.2 Discharging current

The discharging current does not have to surpass this specification document stipulation the biggest discharging current, the oversized electric current electric discharge can cause the battery capacity play to reduce and to cause the battery heat.

9.3 discharge temperature

The battery discharge must carry on in the ambient temperature scope which this specification book stipulated.

9.4 Over-discharges

After the short time excessively discharges charges immediately cannot affect the use, but the long time excessively discharges can cause the battery the performance, battery function losing. The battery long-term has not used, has the possibility to be able to be at because of its automatic flashover characteristic certain excessively discharges the condition, for prevented excessively discharges the occurrence, the battery should maintain the certain electric quantity.

9.5 Storing the Batteries

The battery should store in the product specification book stipulation temperature range. If has surpasses above for six months the long time storage, suggested you should carry on additional charge to the battery.



Safer Vaping

10. Period of Warranty

The period of warranty is one year from the date of shipment. Guarantees to give a replacement in case of cells with defects proven due to manufacturing process instead of the customers abuse and misuse.

11. Chemical Reaction

Because batteries utilize a chemical reaction, battery performance will deteriorate over time even if stored for a long period of time without being used. In addition, if the various usage conditions such as charge, discharge, ambient temperature, etc. are not maintained within the specified ranges the life expectancy of the battery may be shortened or the device in which the battery is used may be damaged by electrolyte leakage. If the batteries cannot maintain a charge for long periods of time, even when they are charged correctly, this may indicate it is time to change the battery.

12. Note

Any other items which are not covered in this specification shall be agreed by both parties.